

AMM

Product Specifications

Material

Insulator	Special LCP (Liquid Crystal Polymer thermoplastic) UL 94-V0
LF Contacts	Male : Copper alloy / Ni + Au 0.15 to 0.4max Female : Copper zinc alloy / Ni + Au 0.15 to 0.4max
Fixing Hardware	Passivated Stainless steel 300 series

Electrical Features

Contact current capacity	UP to 4.8A@25°C (PCB to cable 20 pins) Up to 2.5@25°C (PCB to PCB 20 pins)
Working voltage	Withstanding voltage @ seal level : 600 V RMS Voltage proof @ sea level : 1000 V RMS
Contact resistance	Contact resistance (initial) < 10 mΩ max
Insulation resistance	insulation resistance (after conditioning) > 2 Gohm

Mechanical Features

Contact durability	1000 min operations
Contact force	Engagment (max) : 0.7 N Separation (min) : 0.06 N
Contact retention	Contact retention > 6 N
Max torque	Screw-Lok torque 16 cNm

Environmental Features

Temperature cycling	-65°C to 200°C
Humidity severity	25 °C -65 °C / 89 % - 94 % humidity / 6 days
Vibration severity (min)	Sinusoidal vibration / 15g / 10 Hz - 2000 Hz - 10 Hz in 20 min / 4h per axe in each 3 axes (total 12h) "No electrical interruption greater than one microsecond during vibration test"
Shock severity	Peak acceleration: 100g/Normal Duration 6ms, Wave form: sawtooth

a	17/09/18	P.K	T.V	V.G
Ind	Date	Drawn	Checked	Approved
Item :	Connector AMM 220 male straight on PCB, nn LF Contacts, V22.			

Compliant matrix :

Customer reference :

General


tolerance ±0.2

Scale



3:1

Page


1/1



CUT A-A

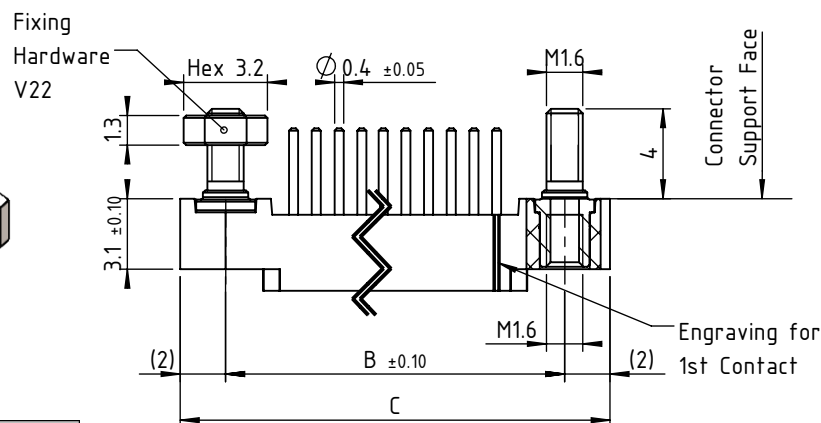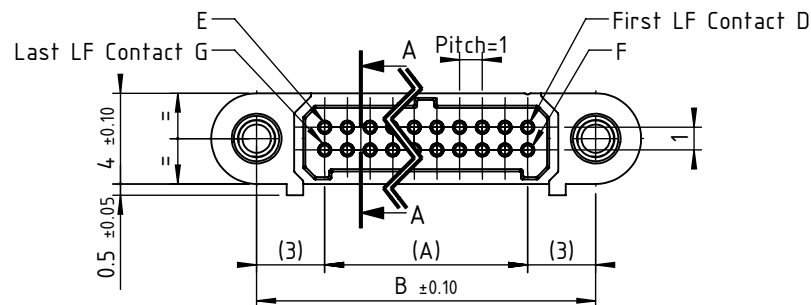

3D View

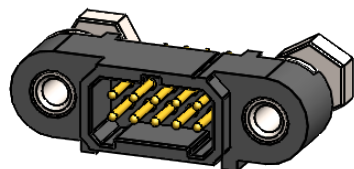

No. Of Contacts	Distance Between axes		Length in mm	LF Contact Reference				
nn	A	B	C	D	E	F	G	
4	1	7	11	1	2	3	4	
6 ◆	2	8	12	1	3	4	6	
8	3	9	13	1	4	5	8	
10 ◆	4	10	14	1	5	6	10	
12	5	11	15	1	6	7	12	
14	6	12	16	1	7	8	14	
16	7	13	17	1	8	9	16	
18	8	14	18	1	9	10	18	
20 ◆	9	15	19	1	10	11	20	
22	10	16	20	1	11	12	22	
24	11	17	21	1	12	13	24	
26	12	18	22	1	13	14	26	
28	13	19	23	1	14	15	28	
30	14	20	24	1	15	16	30	
32	15	21	25	1	16	17	32	
34 ◆	16	22	26	1	17	18	34	
36	17	23	27	1	18	19	36	
38	18	24	28	1	19	20	38	
40	19	25	29	1	20	21	40	
42	20	26	30	1	21	22	42	
44	21	27	31	1	22	23	44	
46	22	28	32	1	23	24	46	
48	23	29	33	1	24	25	48	
50 ◆	24	30	34	1	25	26	50	

NOTE:

1. Tape and Reel packaging
2. ◆ Configurations are available in stock
3. "Feel free to ask for technical support"

This document and drawings, sketches, and schematic drawings are the property of the NICOMATIC company, and no parts thereof may be reproduced and used without the written consent of the owner. Law dated 11.03.1902

Catalogue
Reference :

A221YnnV22

Compliant matrix :

Customer reference :



General tolerance ±0.2

Scale 3:1

Page 1/1